




DESCRIPTION

The **CBS ArcSafe®RSA-54** allows technicians to remotely operate Toshiba JK Starter circuit breakers from a safe distance while remaining stationed outside of the arc-flash boundary. Installation and operation does not require any modifications to the existing electrical equipment. The **CBS ArcSafe®RSA-54** is compatible with almost all configurations of the Toshiba JK. The CBS ArcSafe®RSA-54 is a cost-effective solution for keeping operators safe when compared to other arc-flash mitigation alternatives.

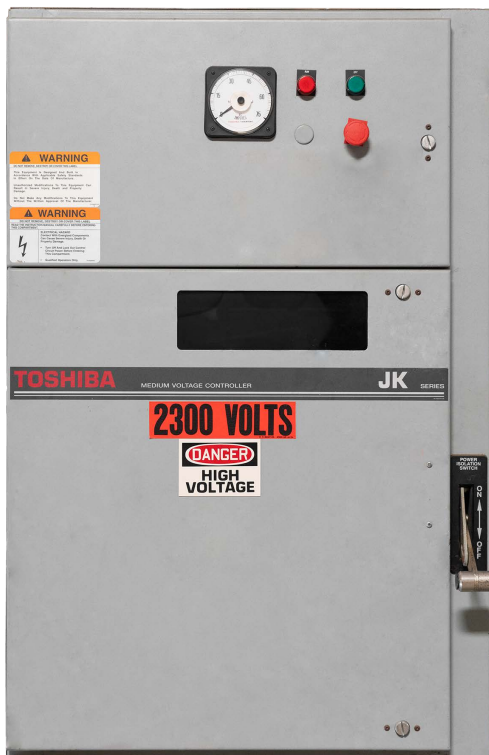

SPECIFICATIONS

WEIGHT:	25.7 lbs
DIMENSIONS:	7.4" H x 22.9" W x 13.5" D
POWER CONSUMPTION:	100W
OPERATING DISTANCE:	25-300 feet
COMPATIBILITY:	Toshiba JK Motor Starter (MVMCC)
CONTROL/POWER SOURCE:	CBS ArcSafe® RSO-IAR-M18 Control Console

OVERVIEW

- Remote operation up to 300 feet away
- Lightweight and portable for hard-to-access areas
- Simple setup, no equipment modification required
- Quick installation and removal from gear
- Adjustable travel and locators to accommodate entire product line
- Reduces or eliminates need for arc-flash hazard suits
- Eliminates all hazardous manual contact with gear during operation
- Designed, manufactured, and assembled in the USA

