

DESCRIPTION

The remote switching kit (Fig 1.1) allows the Schneider & Square D PowerPacT R Frame molded-case circuit breaker (Fig 1.2) to be opened, closed, or reset remotely while the technician is away from the panel.

The device is driven by an linear actuator with internal limit switches and real-time feedback displayed on the handheld controller via the 30' operating cord. The unit is powered by a Milwaukee M18™ REDLITHIUM™ Ion battery pack (2.0 Ah).


The device can be easily installed and removed via the switchable magnets which aid in the no-modification design. Standard additions of a kirk-key or a LOTO bracket on the RH side of the switch have been designed for.

Designed with the technician in mind, this remote switching kit comes with a custom foam hard plastic case for easy transport and safe storage.

Figure 1.1



Figure 1.2

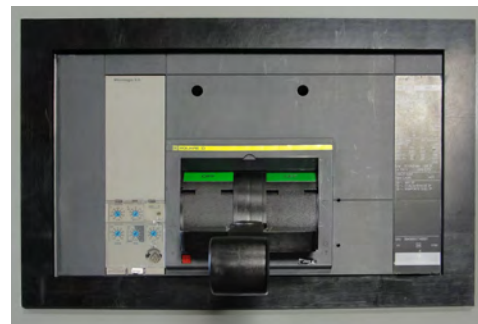

INSTALLATION & OPERATION

Three easy steps. Installs in seconds. RSKs do not require external power or modifications to switchgear.


Step 1

Install & engage magnets for attachment.



Step 2

Operate the intended action remotely.

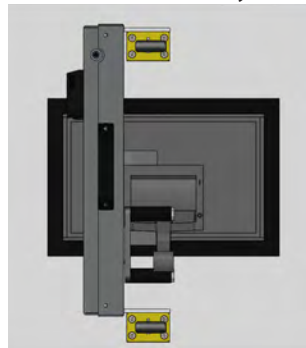

Step 3

Disengage magnets and remove device from gear.



RSK-SRF30

Schneider & Square D PowerPacT

R Frame (Includes RG, RJ, RK, RL) 600-3000 A



1. Hard plastic and custom foam case
2. 30-foot operating cord
3. Actuator assembly
4. Handheld controller
5. Milwaukee M18 charger
6. Milwaukee 2.0 Ah M18 battery pack



SPECIFICATIONS

- Holding magnets: Two at max breakaway (600 lbs @ full saturation thickness of 3/8")
- Actuator size (with battery): 21.875" L x 8.75" W x 7.75" H
- Actuator weight (with Battery): 23.8 lbs./10.79 kg
- Power supply: POWERED BY M18™ REDLITHIUM™; other M18 batteries are compatible. Note: Use only batteries manufactured by Milwaukee; otherwise warranty will be voided.
- Metal dome membrane switches on the control panel with a lifetime of 1,000,000 cycles.

HANDHELD CONTROLLER LAYOUT



Distance is Safety®
CBSArcSafe.com

(472-3389)
(877) 4-SAFETY



2616 SIRIUS ROAD, DENTON, TX 76208 | INFO@CBSARC SAFE.COM