




DESCRIPTION

The **CBS ArcSafe RSA-69A** remote switch actuator is designed to remotely close or trip all sizes of ABB/Sace Megamax F Series (F1 to F6) low-voltage power circuit breakers from a safe distance stationed outside the arc-flash perimeter. Capable of being operated from up to 300 feet away, this custom-built actuator reduces or eliminates the need for arc-flash hazard suits. The **RSA-69A** is also lightweight and portable, making it ideal for hard-to-access areas.

SPECIFICATIONS

WEIGHT:	13.5 lbs.
DIMENSIONS:	21.7" H x 7.9" W x 6.6" D
POWER CONSUMPTION:	85 Watts
OPERATING DISTANCE:	25-300 Feet
COMPATIBILITY:	Megamax F Series Low-Voltage Power Circuit Breakers, 1200-6000A, All Sizes (F1, F2, F3, F4, F5, F6)
CONTROL/POWER SOURCE:	CBS ArcSafe® RSO-I AR control console

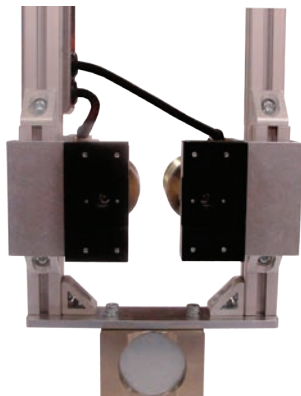

OVERVIEW

- Remote operation from up to 300 feet away
- Lightweight and portable for hard-to-access areas
- Simple setup, no equipment modification required
- Quick installation and removal from gear
- Adjustable travel and locators to accommodate entire product line
- Reduces or eliminates need for arc-flash hazard suits
- Eliminates all hazardous manual contact with gear during operation
- Designed, manufactured, and assembled in the USA

